

CC/CV Mode Synchronous

Step-Down Converter

DESCRIPTION

The EUP3270 is a synchronous step-down converter capable of driving 4A continuous load with excellent line and load regulation. The EUP3270 operates in either CC (Constant Current) mode or CV (Constant Voltage) mode with an input voltage range from 4.5V to 30V. The EUP3270 provides programmable cable compensation by adjusting external resistor divider. External shutdown function can be controlled by pulling COMP pin to a level below 0.14V.

Fault protection includes secondary cycle-by-cycle current limit, short circuit protection and thermal shutdown. Internal soft-start minimizes the inrush supply current and the output overshoot at initial startup.

The EUP3270 is available in SOP-8 (EP) package.

FEATURES

- 4.5V to 30V Wide Input Operating Range
- 80kHz~800kHz Switching Frequency Selection
- CC/CV Mode Control
- Up to 4A Output Current
- +/- 1% Voltage Reference Accuracy
- +/- 4% Constant Current Accuracy
- Programmable Cable Compensation
- Internal Soft Start
- Single Pin to External Compensation and Shutdown Control
- Hiccup Short Circuit Protection
- Secondary Cycle-by-Cycle Current Limit
- Thermal Shutdown
- Available in SOP-8 (EP) Package
- RoHS Compliant and 100% Lead(Pb)-Free Halogen-Free

APPLICATIONS

- Car Charger
- Portable charger applications
- DC/DC converters with current limited

Typical Application Circuit

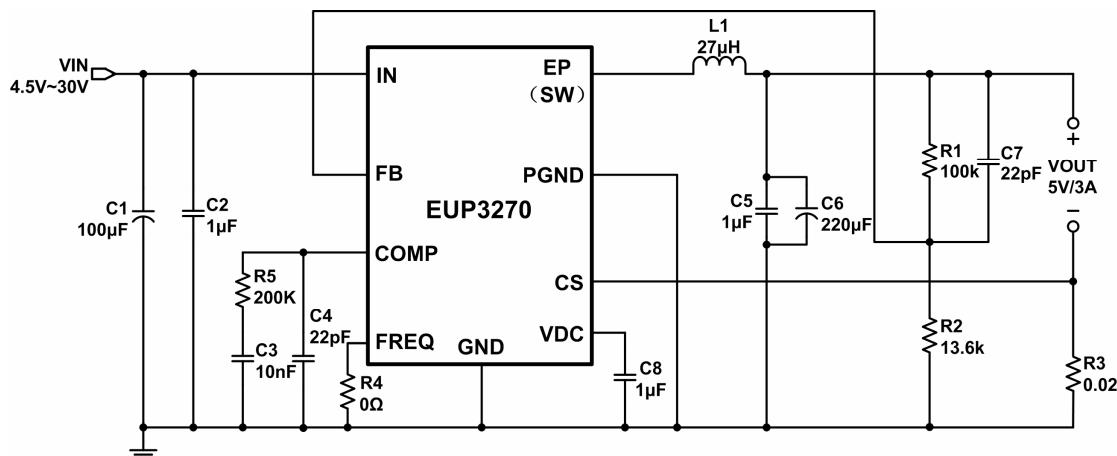


Figure 1. Application Circuit

Block Diagram

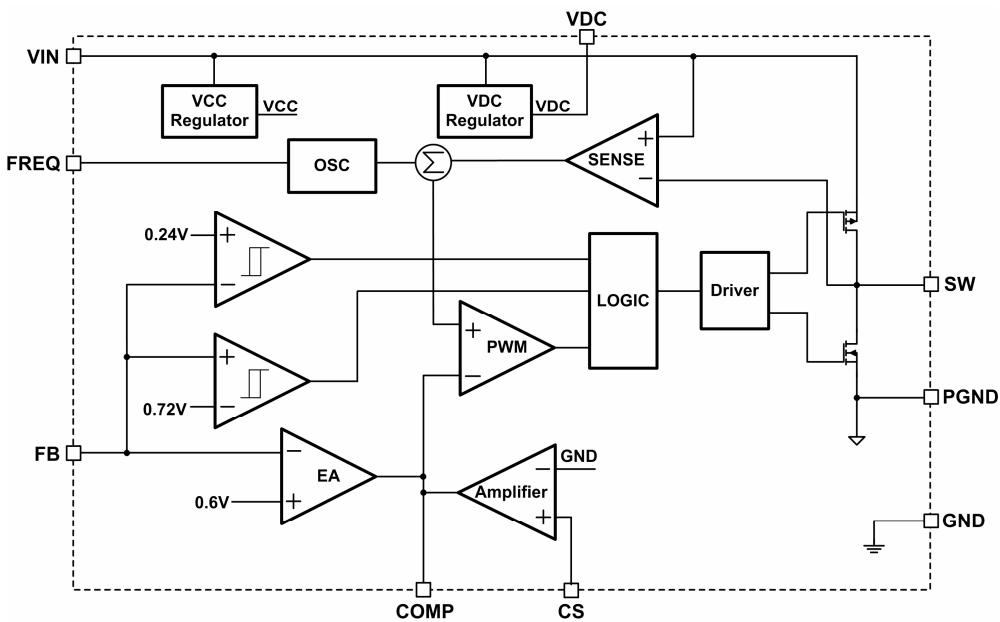


Figure 2. Functional Block Diagram

Pin Configurations

Package Type	Pin Configurations
SOP-8 (EP)	<p>(Top View)</p>

Pin Description

Pin Name	SOP-8 (EP)	DESCRIPTION
VIN	1	Input Supply Pin.
GND	2	Ground.
COMP	3	Loop compensation pin. Drive COMP voltage logic low to turn off the converter.
FB	4	Output Feedback Input.
CS	5	Current sense input pin.
VDC	6	Internal VDC regulator output. Bypass VDC to ground with a ceramic capacitor.
FREQ	7	Frequency select pin.
PGND	8	Power ground.
SW	EP	Power switch pin.

Ordering Information

Order Number	Package Type	Marking	Quantity per Reel	Operating Temperature Range
EUP3270WIR1	SOP-8 (EP)	 XXXXX P3270	2500	-40°C to +85°C

EUP3270

Lead Free Code

1: Lead Free, Halogen Free

Packing

R: Tape & Reel

Operating temperature range

I: Industry Standard

Package Type

W: SOP (EP)

Absolute Maximum Ratings (1)

■ Input Voltage (V_{IN}) -----	-0.3V to 32V
■ Switch Voltage (V_{SW}) -----	-1V to $V_{IN} + 0.3V$
■ CS -----	-0.3V to 13V
■ All Other Pins -----	-0.3V to 6V
■ Junction Temperature -----	150°C
■ Storage Temperature -----	-65°C to +150°C
■ Lead Temp(Soldering, 10sec) -----	260°C
■ Thermal Resistance θ_{JA} (SOP-8_EP) -----	60°C /W

Recommend Operating Conditions (2)

■ Supply Voltage (V_{IN}) -----	4.5V to 30V
■ Operating Temperature Range -----	-40°C to +85°C

Note (1): Stress beyond those listed under "Absolute Maximum Ratings" may damage the device.

Note (2): The device is not guaranteed to function outside the recommended operating conditions.







Electrical Characteristics

($V_{IN}=12V$, $T_A=+25^{\circ}C$, $I_{OUT}=2.0A$, unless otherwise specified)

Parameter	Conditions	EUP3270			Unit
		Min.	Typ.	Max.	
Input voltage		4.5		30	V
Input No Load Current	$I_{OUT}=0A$			10	mA
Quiescent Current	$V_{FB}=0.8V$		1		mA
Shutdown Current	$V_{COMP}=0V$		380		μA
Input Under Voltage Lockout Threshold Rising		3.95	4.15	4.35	V
Input Under Voltage Lockout Threshold Hysteresis			0.4		V
Current Limit			7.5		A
Operating frequency	$R_4=0\Omega$	135	150	165	kHz
		$T_J = -25^{\circ}C \text{ to } 125^{\circ}C$	127	173	kHz
Maximum Duty Cycle				100	%
Minimum On-Time			150		ns
Reference Voltage of the Voltage Error Amplifier		0.594	0.6	0.606	V
	$T_J = -25^{\circ}C \text{ to } 125^{\circ}C$	0.587		0.613	V
CS Reference Voltage		57.4	60	62.6	mV
	$T_J = -25^{\circ}C \text{ to } 125^{\circ}C$	56.4		63.6	mV
Transconductance of Error Amplifier			75		μA/V
Reference Voltage of the Short Circuit Foldback Comparator			0.24		V
COMP Enable Threshold Rising			0.14		V
COMP Enable Threshold Hysteresis			40		mV
Thermal Shut-down Temperature	Temperature Rising		150		°C
	Temperature Falling		100		°C
PMOS Drain-Source On-State Resistance	$V_{IN}=12V, I_{OUT}=1A$		35		mΩ
	$V_{IN}=5V, I_{OUT}=1A$		44		
NMOS Drain-Source On-State Resistance	$I_{OUT}=1A$		32		mΩ

Typical Operating Characteristics

$V_{IN}=12V$, $V_{OUT}=5V$, $F_{SW}=150KHz$, $T_A=25^{\circ}C$, unless otherwise noted.

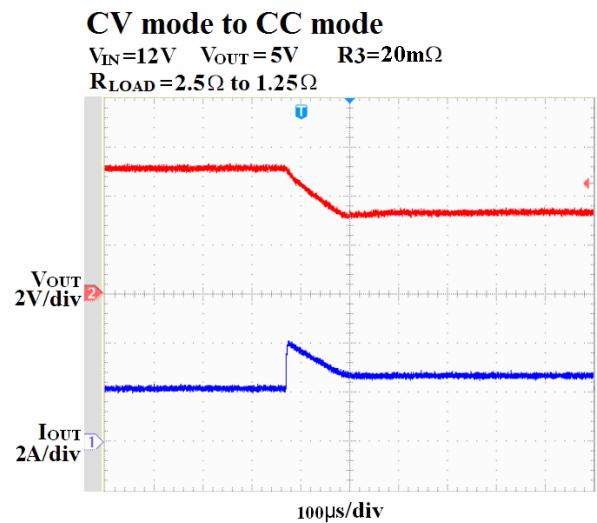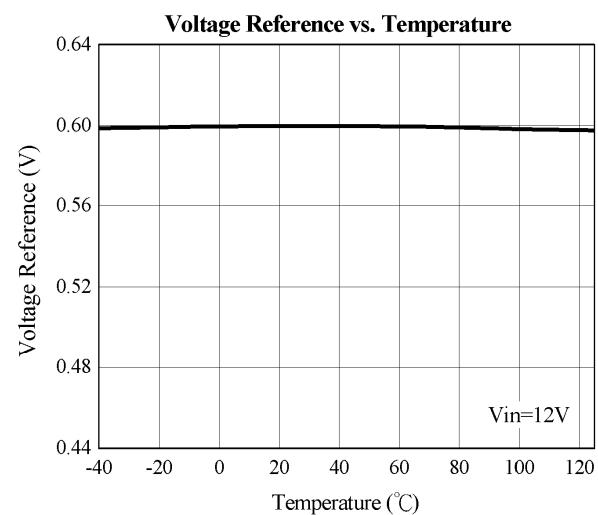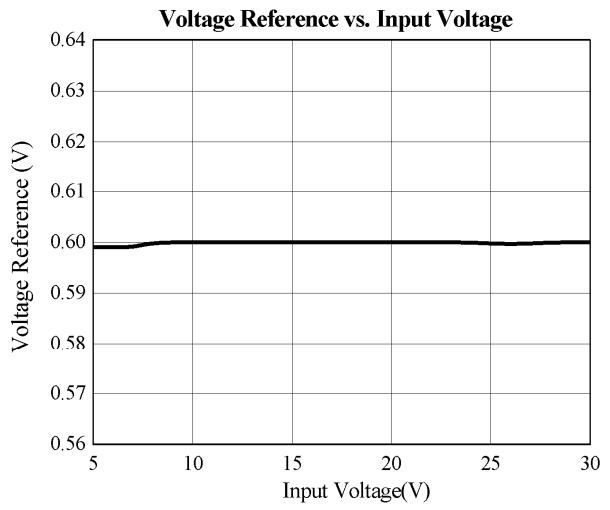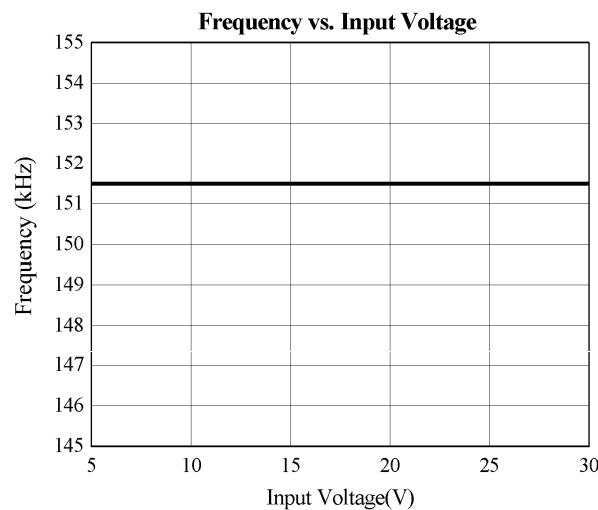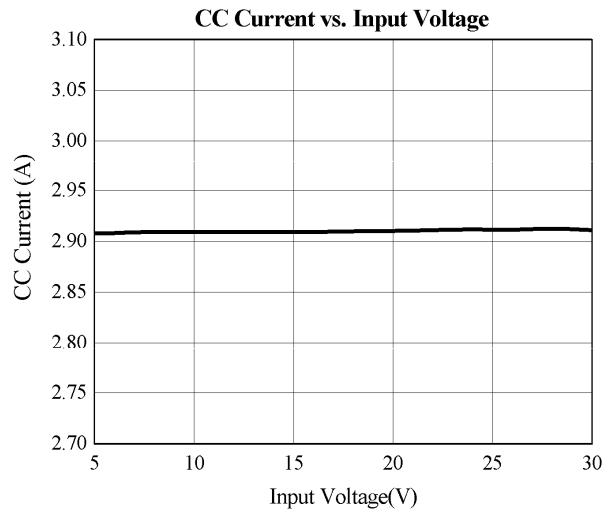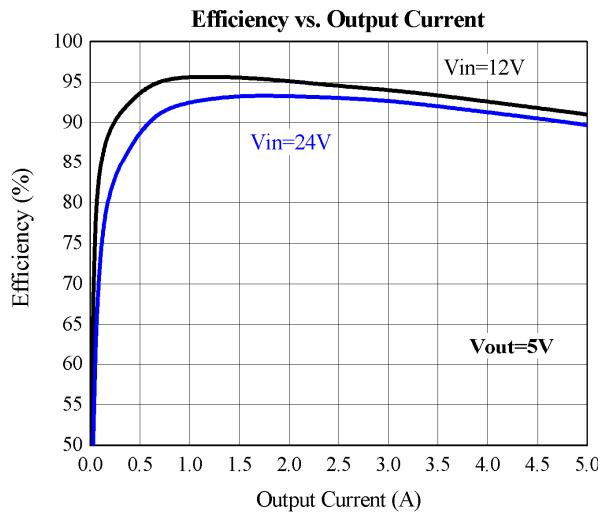


Typical Operating Characteristics (continued)


$V_{IN}=12V$, $V_{OUT}=5V$, $F_{SW}=150KHz$, $T_A=25^{\circ}C$, unless otherwise noted.

CC mode to CV mode


$V_{IN}=12V$ $V_{OUT}=5V$ $R_3=20m\Omega$
 $R_{LOAD} = 1.25\Omega$ to 2.5Ω

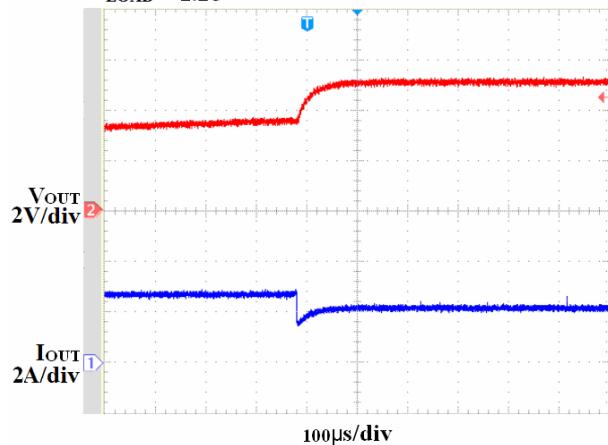
Short Circuit


$V_{IN}=12V$ $V_{OUT}=5V$ $R_3=20m\Omega$

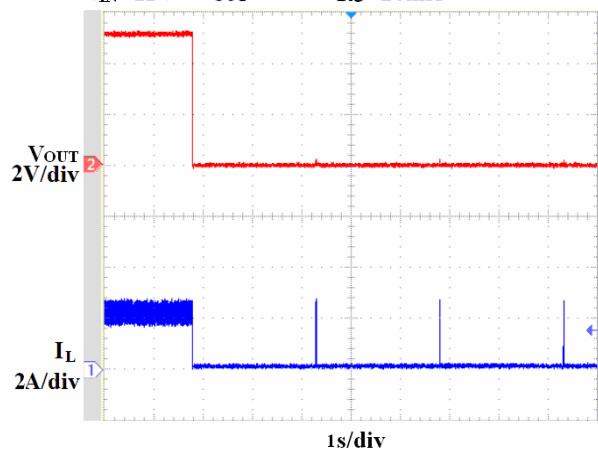
Short Circuit Recovery

$V_{IN}=12V$ $V_{OUT}=5V$ $R_3=20m\Omega$

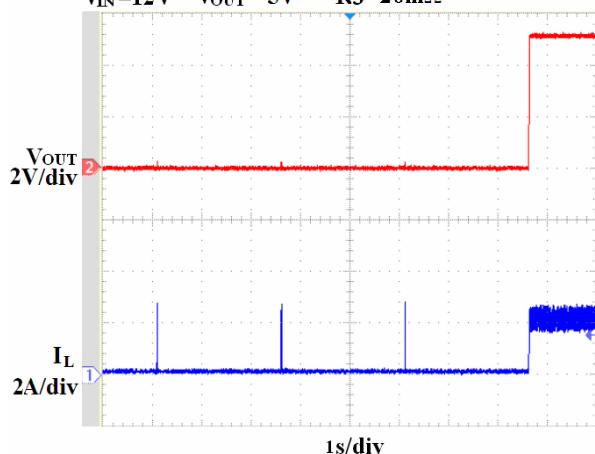
Load Transient

$V_{IN}=12V$ $V_{OUT}=5V$
 $I_{OUT}=0.1A$ to $3A$

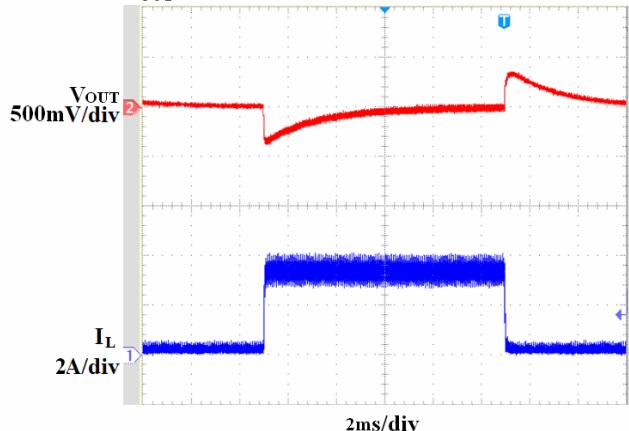

Functional Description

The EUP3270 is a current-mode synchronous step-down converter with 4.5V to 30V input power supply. The device can provide up to 4A continuous current to the output. The EUP3270 uses current-mode architecture to control the regulator loop. The output voltage is measured at FB through a resistive voltage divider and amplified through the internal error amplifier. The output current of the transconductance error amplifier is presented at COMP pin where a RC network compensates the regulator loop. Slope compensation is internally added to eliminate subharmonic oscillation at high duty cycle. The slope compensation adds voltage ramp to the inductor current signal which reduces maximum inductor peak current at high duty cycles.

CC/CV mode control

The EUP3270 operates in either CC mode or CV mode. The CV mode regulates the output voltage. When output current reaches the CC threshold, the device enters CC mode to limit the output current.

Programmable cable compensation

The EUP3270 provides programmable cable compensation by adjusting the external resistor divider to compensate resistive voltage drop across the charger's output cable.

Internal soft-start

Internal soft-start minimizes the inrush supply current and the output overshoot at initial startup.

Short circuit protection

The EUP3270 provides the output short circuit protection function to prevent large output short circuit current from damaging the device. When output short happens, the device shuts down and returns to normal operation automatically when the short circuit condition is released.

Thermal Shutdown

The EUP3270 stops switching when its junction temperature exceeds 150°C and resumes when the temperature has dropped by 50°C to protect the device.

Application Information

The output voltage is set through a resistive voltage divider and can be expressed by the equation as follows

$$V_{OUT} = 0.6V \times (R1 + R2) / R2$$

Setting the CC current

EUP3270 constant current value is set by the resistor R3 connected between the CS and GND pins. The CC current is determined by the equation as follows

$$I_{CS} = 0.06V / R3$$

Setting the switching frequency

The switching frequency is set by the resistor R4 connected between the FREQ and GND pins and can be expressed by the equation as follows

$$f_{SW} = 10^{11} / R4$$


The switching frequency is 150kHz when R4=0Ω.

Setting the cable compensation

The EUP3270 provides programmable cable voltage drop compensation using the impedance at the FB pin to compensate voltage drop across the charger's output cable. The cable compensation voltage can be expressed as

$$\Delta V_{OUT} = 38\mu \times (I_{OUT} \times R3) \times R1$$

By adjust the value of R1, the cable compensation voltage can be programmed.

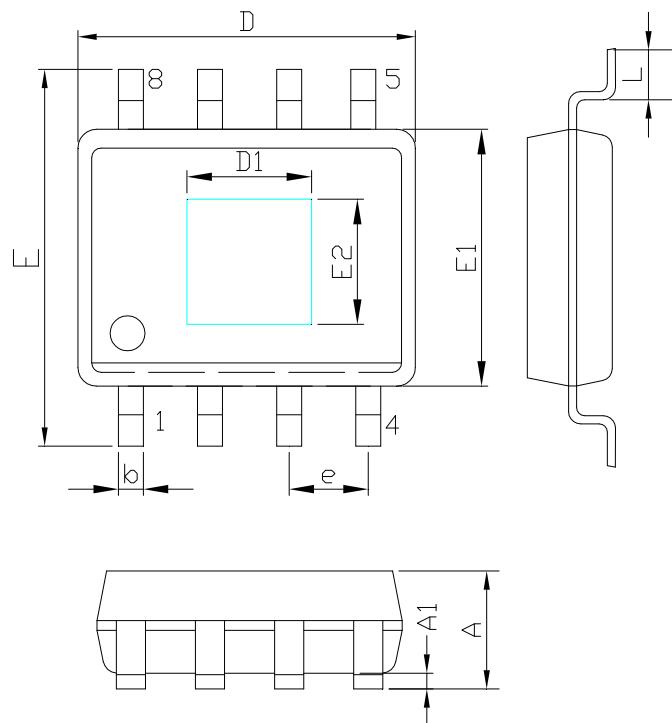Packaging Information**SOP-8 (EP)**

Remark: Exposed pad outline drawing is for reference only.

SYMBOLS	MILLIMETERS			INCHES		
	MIN.	Normal	MAX.	MIN.	Normal	MAX.
A	1.35	-	1.75	0.053	-	0.069
A1	0.00	-	0.25	0.000	-	0.010
D	4.80	4.90	5.00	0.189	0.193	0.197
E1	3.70	3.90	4.00	0.146	0.154	0.157
D1	2.67	2.97	3.50	0.105	0.117	0.138
E2	1.78	2.18	2.60	0.070	0.086	0.102
E	5.80	6.00	6.20	0.228	0.236	0.244
L	0.40	-	1.27	0.016	-	0.050
b	0.31	-	0.51	0.012	-	0.020
e	1.27 REF			0.050 REF		